


AzuLite 35 Xtra

OPTICAL & SOLAR PROPERTIES

	Single Pane	Single Bronze 6mm
Visible Light Transmitted	33 %	19 %
Visible Light Reflected (Int)	21 %	10 %
Visible Light Reflected (Ext)	15 %	14 %
Ultra Violet Block	99 %	99 %
Total Solar Energy Reflected	24 %	23 %
Total Solar Energy Transmitted	31 %	17 %
Total Solar Energy Absorbed	45 %	60 %
Emissivity (Room Side)	0.84	0.84
Glare Reduction	63 %	79 %
Shading Coefficient	0.51	0.41
Solar Heat Gain Coeff. (G-Value)	0.45	0.35
U-Value Winter (IP)	1.04	0.48
U-Value Winter (SI)	5.91	2.73
Total Solar Energy Rejected	55 %	65 %

R081SBX - AzuLite 35 Xtra Pressure Sensitive Adhesive

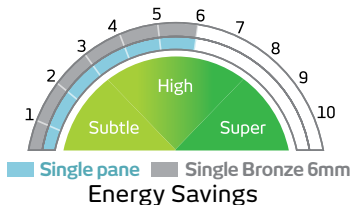

Ed A DS No 2001 November 2015